


0603 KSS NYLON CABLE GLAND (WITH STRAIN RELIEF)

Strain relief design protect cable from breakage/right angle bending

- Material: UL94V-2 flame rated, UL approved Nylon 66, TPE for Seal, PVC for Washer.
- Color: Black, available in other colors.
- EG-SR series without washer, NPT-SR without washer and lock nut.

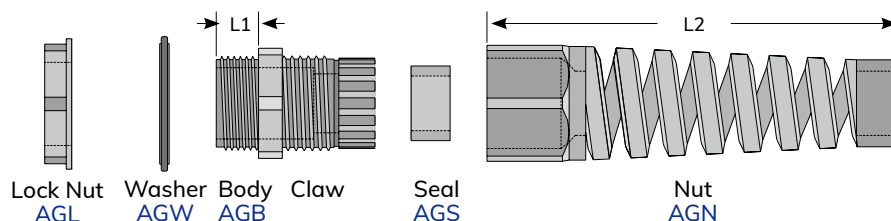

METRIC THREAD ※Protection : IP68

UNIT : mm

Item No.	Thread	Thread O.D.	Mounting Hole	L1	L2	Cable Range	Packing
AG-12SR	M12x1.25	12	12+0.2	7.9	53.3	3~6.5	50pcs
AG-16SR	M16x1.5	16	16+0.2	15.5	74.4	5~10	
AG-20SR	M20x1.5	20	20+0.2	15.0	96.2	10~14	
AG-25SR	M25x1.5	25	25+0.3	15.2	111.2	13~18	25pcs

PG THREAD ※ Without washer

EG-7SR	PG-7	12.5	12.5+0.2	7.9	53.3	3~6.5	50pcs
EG-9SR	PG-9	15.2	15.2+0.2	7.9	61.0	4~8	
EG-11SR	PG-11	18.6	18.6+0.2	7.9	74.9	5~10	
EG-13.5SR	PG-13.5	20.4	20.4+0.2	8.9	85.5	6~12	
EG-16SR	PG-16	22.5	22.5+0.2	9.8	96.2	10~14	
EG-21SR	PG-21	28.3	28.3+0.3	10.8	111.2	13~18	25pcs

PF THREAD (G)

AGJ-14SR	PF1/4"	13.2	13.2+0.2	8.0	53.3	3~6.5	50pcs
AGJ-17SR	PF3/8"	16.7	16.7+0.2	14.7	74.9	5~10	
AGJ-21SR	PF1/2"	21.0	21.0+0.2	12.9	96.2	10~14	
AGJ-27SR	PF3/4"	26.4	26.4+0.3	14.7	111.2	13~18	25pcs

NPT THREAD ※ Without washer and lock nut.

NPT-14SR	1/4"-18 NPT	13.3	13.3+0.2	7.8	53.3	3~6.5	50pcs
NPT-38SR	3/8"-18 NPT	17.2	17.2+0.2	14.6	74.9	5~10	
NPT-12SR	1/2"-14 NPT	21.2	21.2+0.2	12.9	96.2	10~14	
NPT-34SR	3/4"-14 NPT	26.3	26.3+0.3	14.5	111.2	13~18	25pcs