


3M™ Performance Plus™ Wire Connectors



We designed our 3M™ Performance Plus™ Wire Connectors with a uniquely flexible spring that has generous room for expansion and a strong bite for a secure connection. Because of their increased wire range, just three Performance Plus wire connectors handle the work of eight standard connectors. There's less inventory to manage with a better chance you'll have the connectors you need to do every job. And the flexible skirt helps prevent copper exposure for enhanced safety. These connectors are UL Listed for 600 volts on copper wire.



3M™ Performance Plus™ Wire Connector	2#22	2#20	2#18	2#16	2#14	2#12	4#14	3#12	6#14	4#12	3#10	5#12	2#8	6#12	4#10	6#10
O/B+, T/Y+																
R/Y+																
T/R+																
B/G+																

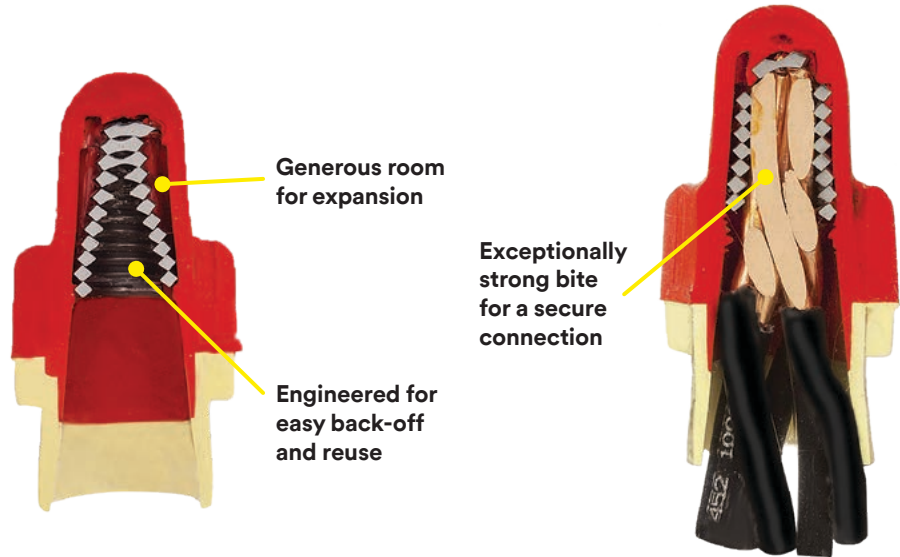

Generous room for expansion

Engineered for easy back-off and reuse

Exceptionally strong bite for a secure connection

The family of 3M™ Performance Plus™ Wire Connectors can do the job of eight standard connectors.

Visit 3M.com/pplus to learn more.

3M™ Performance Plus™ Wire Connector