


# 0505 KSS SELF ADHESIVE TIE MOUNT

- Material: UL94V-2 flame rated, UL approved Nylon 66 with adhesive tape.
- Color : Natural, available in other colors.
- SELF-ADHESIVE TIE MOUNT is designed to support light weight wire bundles when properly applied on any clean, smooth, grease-free surface. For heavy support, mounting hole is provided for screws.
- To apply, simply peel off liner and apply mount to surface. After that, cable ties can be inserted to secure wire bundles.




UNIT : mm


Item No.	L	W	W1	H	Mounting Hole M	Packing
※ ▲ HC-100-S4	12.5	12.5	3.2	3.2		100pcs
※ ▲ HC-101S-S2	19.5	19.5	4.6	3.9	3.2	
▲ HC-101S	19.5	19.5	4.6	3.9	3.2	
▲ HC-101	21.8	21.8	4.8	4.0		
NEW ▲ HC-101SA	19.0	19.0	4.0	4.5	3.4	
▲ HC-102	28.6	28.6	5.5	5.3	5.0	
NEW ▲ HC-102A	28.0	28.0	5.3	5.6	5.6	
HC-103	29.2	29.2	5.5	5.4	5.0	
▲ HC-25	26.1	26.1	8.0	6.0	4.3	
▲ HC-19R	18.9	18.9	4.2	4.6	4.8	
▲ HC-26R	26.3	26.3	5.6	6.0	5.0	
HC-18T	19.0	19.0	4.1	5.0	4.4	
HC-26T	26.5	26.5	5.8	7.4	4.3	
▲ HC-3838	38.5	38.5	10.2	7.6	5.0	




HC-26T




HC-100




HC-101S




HC-101




HC-101SA,102A




HC-102




HC-103




HC-3838



HC-25



HC-19R, 26R



HC-18T

- ※ HC-100-S4 4pcs on a strip (Simply peel off backing paper)
- ※ HC-101S-S2 2pcs on a strip (Simply peel off backing paper)
- ▲ 4 way entry


# 0510 KSS SADDLE TYPE TIE MOUNT

- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color : Natural, available in other colors.
- Saddle design provides maximum stability to wire bundles.
- To apply, simply fix mount with a screw and secure wire bundles with KSS nylon cable ties.



UNIT : mm


Item No.	L	W	W1	H	Mounting Hole M	Packing
HC-0	19.6	9.5	5.2	5.0	3.7	100pcs
HC-0M	19.0	9.5	5.0	5.0	4.3	
HC-0L	19.0	9.5	5.0	5.0	5.2	
HC-0R	19.1	10.0	5.4	6.2	4.2	
HC-1	15.0	10.0	5.1	7.0	3.5	
HC-1S	12.8	7.0	4.0	5.8	3.3	
HC-2S	23.0	16.0	9.0	9.8	5.0	
HC-2	23.0	16.0	9.0	9.8	6.3	
HC-2A	20.5	17.1	10.4	10.4	6.0	
HC-2L	23.0	16.0	9.0	9.8	6.5	
HC-3	23.0	13.8	9.5	17.5	5.3	
HC-4	30.0	14.7	9.3	11.6	5.0	
※ HC-5	21.5	16.0	7.8	10.0	9.7X5.8	

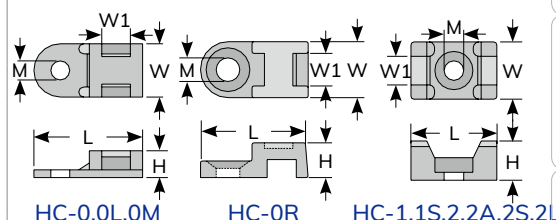

HC-0,0L,0M

HC-0R

HC-1,1S,2,2A,2S,2L

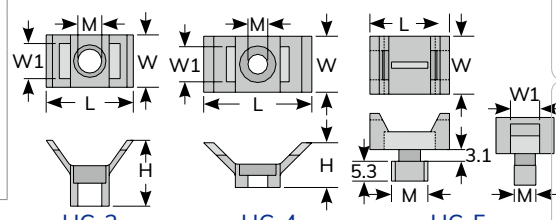

HC-3

HC-4

HC-5

- ※ HC-5 is applied by installing into a mounting hole and rotating to secure it.