


MECHANICAL CONNECTORS



ALUMINUM TWO BARREL CONNECTORS - ONE HOLE MOUNT

- Manufactured from high strength aluminum alloy
- Electro- Tin plated for low contact resistance and protection against corrosion when used with copper wire
- Dual rated for copper and aluminum conductors
- cULus 486B listed
- CSA 22.2 certified
- Rated 600 Volts / 90°C

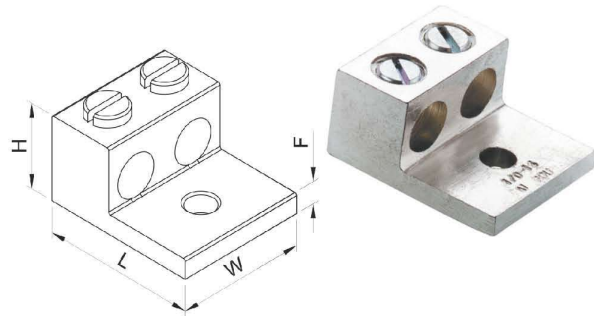


PART NO	CONDUCTOR RANGE		STUD HOLE SIZE	DIMENSION ARE IN INCHES			
	MAX	MIN		L	W	H	F
99012	1/0 STR	14 AWG	1/4	1.46	1.22	0.79	0.19
99013	2/0 STR	14 AWG	1/4	1.46	1.22	0.79	0.19
99014	250 KCMIL	6 STR	3/8	2.56	1.66	1.19	0.25
99015	350 MCM	6 STR	1/2	2.87	1.91	1.22	0.25
99016	600 MCM	2 STR	1/2	3.20	2.40	1.57	0.44
99017	750 MCM	300 KCMIL	5/8	3.35	3.19	1.94	0.50
99018	1000 KCMIL	500 KCMIL	5/8	3.37	3.19	1.94	0.50

- Part number with suffix :- 2-4 mounting holes
- Part number with suffix :- 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.



ALUMINUM TWO BARREL CONNECTORS - TWO HOLE MOUNT

- Manufactured from high strength aluminum alloy
- Electro- Tin plated for low contact resistance and protection against corrosion when used with copper wire
- Dual rated for copper and aluminum conductors
- cULus 486B listed
- CSA 22.2 certified
- Rated 600 Volts / 90°C

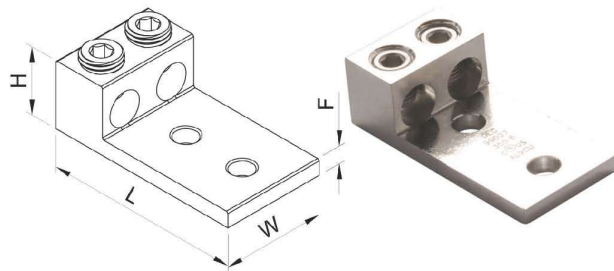

PART NO	CONDUCTOR RANGE		STUD HOLE SIZE	DIMENSION ARE IN INCHES			
	MAX	MIN		L	W	H	F
99013A	2/0 STR	14 AWG	1/4	2.30	1.22	0.79	0.19
99014A	250 KCMIL	6 STR	3/8	4.12	1.66	1.19	0.25
99018A	1000 KCMIL	500 KCMIL	1/2	4.62	3.19	1.94	0.50
99027	350 MCM	6 STR	1/2	4.13	1.91	1.22	0.31
99028	600 MCM	4 STR	1/2	4.22	2.40	1.57	0.44
99029	750 MCM	350 KCMIL	1/2	4.62	3.19	1.94	0.50

- Part number with suffix :- 2-4 mounting holes
- Part number with suffix :- 1/4, 5/16, 3/8, 1/2, 5/8, for mounting stud holes size.

