


ALUMINUM SINGLE BARREL CONNECTORS - ONE HOLE MOUNT

- Manufactured from high strength aluminum alloy
- Electro-Tin plated for low contact resistance and protection against corrosion when used with copper wire
- Dual rated for copper and aluminum conductors
- cULus 486B listed
- CSA 22.2 certified
- Rated 600 Volts / 90°C

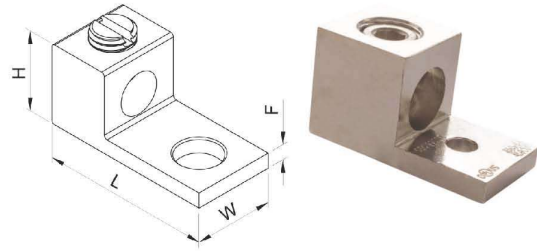

PART NO	CONDUCTOR RANGE		STUD HOLE SIZE	DIMENSION ARE IN INCHES			
	MAX	MIN		L	W	H	F
99001	4 STR	14 AWG	1/4	1.06	0.50	0.50	0.09
99001B	6 STR	14 AWG	1/4	1.06	0.50	0.50	0.09
99001C	4 STR	14 AWG	1/4	1.06	0.50	0.50	0.09
99002	2 STR	14 AWG	1/4	1.16	0.50	0.55	0.11
99003E	1/0 STR	14 AWG	1/4	1.46	0.63	0.79	0.19
99003	1/0 STR	14 AWG	1/4	1.46	0.63	0.79	0.19
99004	2/0 STR	14 AWG	1/4	1.46	0.63	0.79	0.19
99004A	2/0 STR	14 AWG	1/4	2.00	0.63	0.79	0.19
99004B	3/0 STR	6 STR	1/4	1.80	0.80	0.90	0.25
99005B	3/0 STR	8 STR	5/16	2.00	0.94	1.12	0.25
99005	250 MCM	6 STR	5/16	2.00	0.94	1.12	0.25
99006	300 MCM	6 STR	5/16	2.00	0.86	1.12	0.25
99006S	300 MCM	6 STR	5/16	2.00	0.94	1.12	0.25
99006E	300 MCM	6 STR	5/16	2.00	0.94	1.12	0.25
99007	350 MCM	6 STR	3/8	2.25	1.26	1.25	0.25
99008	500 MCM	4 STR	3/8	2.82	1.50	1.57	0.32
99009	600 MCM	2 STR	3/8	3.19	1.50	1.57	0.44
99010	800 MCM	300 MCM	5/8	3.37	1.75	1.94	0.50
99011	1000 MCM	500 MCM	5/8	3.37	1.75	1.94	0.50