




### Light Duty Earth Inspection



The light duty earth inspection housing has a maximum safe working load of 5,000 kgs. It is UV stabilized against degradation by sunlight and non-brittle to prevent cold weather damage. The unique, detachable easy-locking lid ensures security of equipment as the locking mechanism can only be operated by the special key provided with the housing.

The base has built-in slots for locating earth bars. Its lightweight feature allows easy handling, storage and transportation.

The termination depth is increased 100% by simply locking two units together, allowing deeper earth.

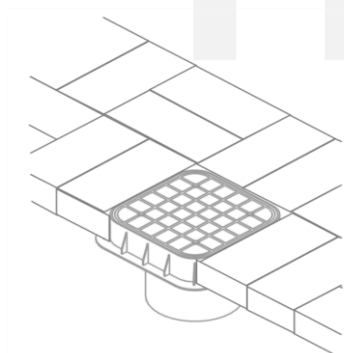

Lid colour	D mm	H mm	L1XW1 mm	Unit Weight KG	Pack Quantity	Part Number
Grey	180	200	245x245	1,75	1	ARDJ 201

Franklin Technologie® - A full range of lightning and overvoltage protection.  
In the continue framework of its products, Franklin France shall be entitled to modify specifications without notice