


Wall supports

Soportes a pared

INSTAFIX Omega support for wall or hanging profile

Soporte Omega INSTAFIX para pared o perfil colgante

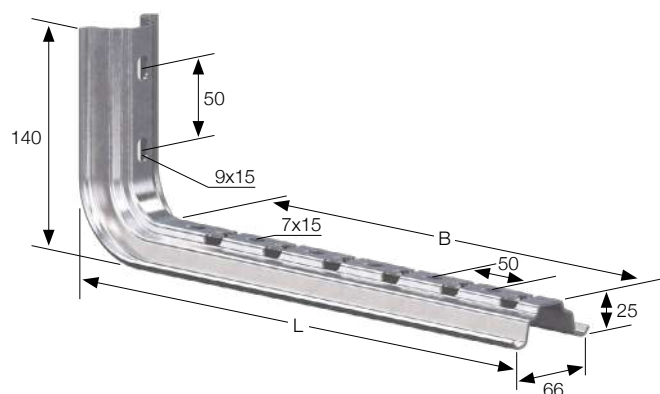

Reference	Referencia		Cable tray width			Load	
			Ancho bandeja	B	L	Carga (N)	u pack
SO10S	SO10G	SO10HR	100	140	165	700	10
SO15S	SO15G	SO15HR	150	190	215	600	10
SO20S	SO20G	SO20HR	200	240	265	550	10
SO30S	SO30G	SO30HR	300	340	365	420	10
SO40S	SO40G	SO40HR	400	440	465	350	10
SO50S	SO50G	SO50HR	500	540	565	320	10
SO60S	SO60G	SO60HR	600	640	665	260	10

For wall fixation, use 2 TSOG shims and suitable anchors.

For fixation to an Omega hanging profile, use 2 TE840G bolts with 2 ARA8G washers, 2 TSOG shims and 2 C6923.8G toothed locknuts.

To fix it to a wall mounted "C" profile, use 2 TE840G bolts with 2 ARA8G washers, 2 TGR8G guided locknuts with retention system and 2 TSOG shims.

Para fijación a pared, utilizar 2 topes TSOG y tacos apropiados.

Para fijación a perfil Omega colgante, utilizar 2 tornillos TE840G con 2 arandelas ARA8G, 2 topes TSOG y 2 tuercas-arandela dentadas C6923.8G.

Para fijación a perfil "C" a pared, utilizar 2 tornillos TE840G con 2 arandelas ARA8G, 2 tuercas guía con retenedor TGR8G y 2 topes TSOG.