



## Guided locknut for "C" profiles Tuerca-guía para perfil "C"

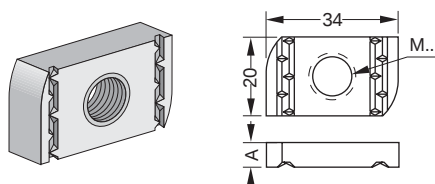

| Reference<br>Referencia | Thread<br>Rosca | Weight/Peso<br>kg/u | u<br>pack |
|-------------------------|-----------------|---------------------|-----------|
| <b>TG8G</b>             | M8              | 0,03                | 50        |
| <b>TG10G</b>            | M10             | 0,03                | 50        |

Use M8 for SO.. supports. | Use M10 for SHE.. and SEC.. supports.  
Utilizar M8 para soportes SO.. | Utilizar M10 para soportes SHE.. y SEC..

## Bolt with hexagonal head Tornillo hexagonal para tuerca-guía




| Reference<br>Referencia | Thread<br>Rosca | Weight/Peso<br>kg/u | u<br>pack |
|-------------------------|-----------------|---------------------|-----------|
| <b>TE835G</b>           | M8 x 35         | 0,03                | 50        |
| <b>TE1020G</b>          | M10 x 20        | 0,02                | 50        |
| <b>TE1070G</b>          | M10 x 70        | 0,04                | 50        |

Use M8 for SO.. supports. | Use M10 for SHE.. and SEC.. supports.  
Utilizar M8 para soportes SO.. | Utilizar M10 para soportes SHE.. y SEC..

## Threaded hanging rod Varilla roscada para suspensión


Length 1 m  
Longitud 1 m

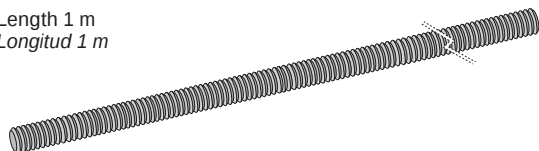

| Reference<br>Referencia | Thread<br>Rosca | Weight/Peso<br>kg/u | u<br>pack |
|-------------------------|-----------------|---------------------|-----------|
| <b>VS8Z3</b>            | M8              | 0,32                | 10        |
| <b>VS10Z3</b>           | M10             | 0,40                | 10        |



Use with 2 C6923.8G/10G toothed lock nuts.  
Utilizar con tuercas arandela dentadas C6923.8G/10G

## Toothed locknut Tuerca-arandela dentada




| Reference<br>Referencia | Thread<br>Rosca | Weight/Peso<br>kg/u | u<br>pack |
|-------------------------|-----------------|---------------------|-----------|
| <b>C6923.8G</b>         | M8              | 0,01                | 50        |
| <b>C6923.10G</b>        | M10             | 0,02                | 50        |

Use M8 for SO.. supports. | Use M10 for SHE.. and SEC.. supports.  
Utilizar M8 para soportes SO.. | Utilizar M10 para soportes SHE.. y SEC..

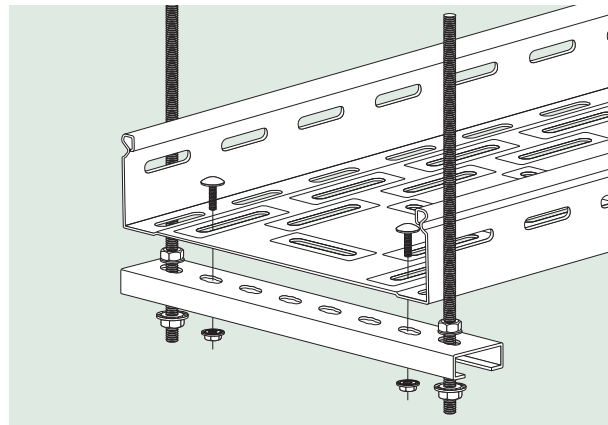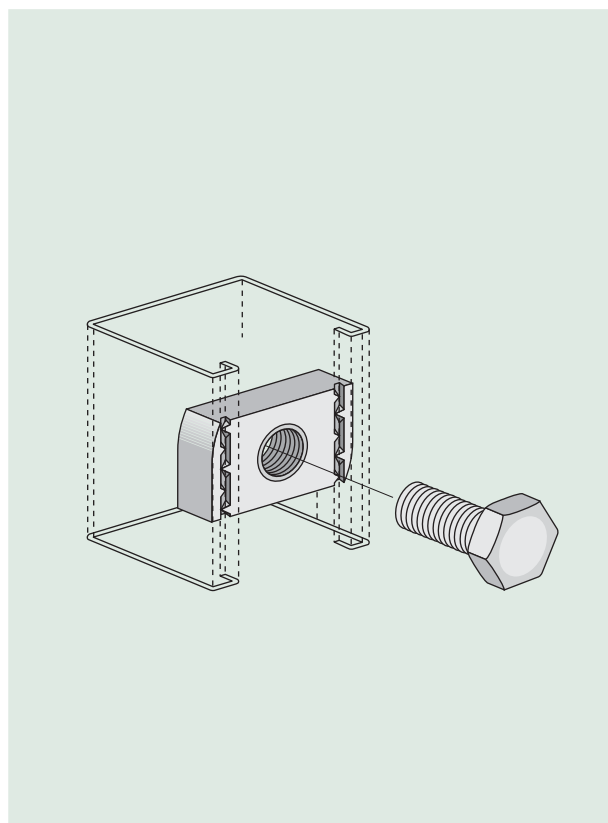

## Bolts with toothed locknuts Tornillos con tuerca-arandela dentada



| Reference<br>Referencia | Thread<br>Rosca | Weight/Peso<br>kg/u | u<br>pack |
|-------------------------|-----------------|---------------------|-----------|
| <b>TCA612Z3</b>         | M6 x 12         | 0,01                | 50        |
| <b>TCA620Z3</b>         | M6 x 20         | 0,01                | 50        |
| <b>TCA612G</b>          | M6 x 12         | 0,01                | 50        |
| <b>TCA620G</b>          | M6 x 20         | 0,01                | 50        |
| <b>TCA820G</b>          | M8 x 25         | 0,02                | 50        |
| <b>TCA1020G</b>         | M10 x 20        | 0,04                | 50        |