


COPPER COMPRESSION LUG

LONG BARREL ONE HOLE TONGUE WITH AND WITHOUT INSPECTION WINDOW

- Manufactured from high conductivity seamless copper tubing .
- Tin plating for corrosion resistance .
- Inspection hole to ensure full cable insertion
- Color coded die index and crimp mark .
- Connectors suitable for application with upto 35 KV
- Rated 600 Volts / 90°C
- cULus 486A listed, CSA 22.2 certified.
- Prefix 'F' for flare entry (bell Mount).
- Suffix 'NT' for narrow tongue .
- Prefix 'BT' for blank tongue.
- Prefix 'BTF' blank tongue flared barrel.

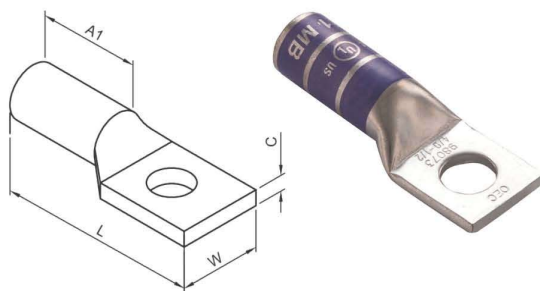

COMPRESSION CONNECTORS

PART NO	CU COMPACT CLASS B, C, K	EXPANDED RANGE	DLO & FLEX CLASS H, G, M	DIMENSION ARE IN INCHES					COLOR CODE
				STUD SIZE	L	A1	W	C	
98064	8	--	8	1/4	1.52	0.81	0.42	0.08	RED
98064A				#10	1.52	0.81	0.42	0.08	
98064B				3/8	1.59	0.81	0.57	0.05	
98065	6	6-8	7	1/4	1.77	0.98	0.42	0.08	BLUE
98065A				3/8	1.91	0.98	0.59	0.05	
98065B				5/16	1.91	0.98	0.51	0.07	
98065C				#10	1.77	0.98	0.42	0.08	
98066	4	4 - 6	5	1/4	1.77	0.98	0.49	0.09	GRAY
98066A				3/8	1.91	0.98	0.59	0.07	
98066B				5/16	1.77	0.98	0.49	0.09	
98066C				#10	1.77	0.98	0.49	0.09	
98066D	3	3 - 6	4	#10	2.07	1.10	0.50	0.09	WHITE
98066E				1/4	2.07	1.10	0.50	0.09	
98066F				5/16	2.07	1.10	0.55	0.09	
98066G				3/8	2.07	1.10	0.59	0.08	
98067	2	2 - 6	3	5/16	2.07	1.10	0.60	0.10	BROWN
98067A				3/8	2.07	1.10	0.60	0.10	
98067B				1/4	2.07	1.10	0.60	0.10	
98067C				#10	2.07	1.10	0.60	0.10	
98068	1	1 - 6	2	5/16	2.11	1.10	0.67	0.11	GREEN
98068A				3/8	2.21	1.10	0.67	0.11	
98068B				#10	2.11	1.10	0.67	0.11	
98069	1/0	1/0 - 6	1	5/16	2.21	1.20	0.74	0.13	PINK
98069A				#10	2.21	1.20	0.74	0.13	
98069B				1/4	2.21	1.20	0.74	0.13	
98070				3/8	2.21	1.20	0.74	0.13	
98070A				1/2	2.50	1.20	0.74	0.13	
98070B				5/16	2.68	1.38	0.81	0.12	
98071	2/0	2/0 - 4	1/0	3/8	2.68	1.38	0.81	0.12	BLACK
98071A				1/2	2.68	1.38	0.81	0.12	
98071B				1/4	2.68	1.38	0.81	0.13	
98072	3/0	3/0 - 2	2/0	1/2	2.80	1.42	0.90	0.13	ORANGE
98072A				3/8	2.80	1.42	0.90	0.13	
98072B				1/4	2.80	1.42	1.00	0.13	

- Connector with prefix letter 'P' stand for the no's with inspection window.