


COPPER COMPRESSION LUG

LONG BARREL ONE HOLE TONGUE WITH AND WITHOUT INSPECTION WINDOW

- Manufactured from high conductivity seamless copper tubing .
- Tin plating for corrosion resistance .
- Inspection hole to ensure full cable insertion
- Color coded die index and crimp mark .
- Connectors suitable for application with upto 35 KV
- Rated 600 Volts / 90°C
- cULus 486A listed, CSA 22.2 certified.
- Prefix 'F' for flare entry (bell Mount).
- Suffix 'NT' for narrow tongue .
- Prefix 'BT' for blank tongue.
- Prefix 'BTF' blank tongue flared barrel.

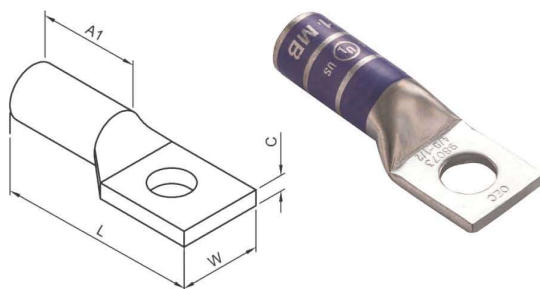

PART NO	CU COMPACT CLASS B, C, K	EXPANDED RANGE	DLO & FLEX CLASS H, G, M	DIMENSION ARE IN INCHES					COLOR CODE
				STUD SIZE	L	A1	W	C	
98064	8	--	8	1/4	1.52	0.81	0.42	0.08	RED
98064A				#10	1.52	0.81	0.42	0.08	
98064B				3/8	1.59	0.81	0.57	0.05	
98065	6	6-8	7	1/4	1.77	0.98	0.42	0.08	BLUE
98065A				3/8	1.91	0.98	0.59	0.05	
98065B				5/16	1.91	0.98	0.51	0.07	
98065C				#10	1.77	0.98	0.42	0.08	
98066	4	4 - 6	5	1/4	1.77	0.98	0.49	0.09	GRAY
98066A				3/8	1.91	0.98	0.59	0.07	
98066B				5/16	1.77	0.98	0.49	0.09	
98066C				#10	1.77	0.98	0.49	0.09	
98066D	3	3 - 6	4	#10	2.07	1.10	0.50	0.09	WHITE
98066E				1/4	2.07	1.10	0.50	0.09	
98066F				5/16	2.07	1.10	0.55	0.09	
98066G				3/8	2.07	1.10	0.59	0.08	
98067	2	2 - 6	3	5/16	2.07	1.10	0.60	0.10	BROWN
98067A				3/8	2.07	1.10	0.60	0.10	
98067B				1/4	2.07	1.10	0.60	0.10	
98067C				#10	2.07	1.10	0.60	0.10	
98068	1	1 - 6	2	5/16	2.11	1.10	0.67	0.11	GREEN
98068A				3/8	2.21	1.10	0.67	0.11	
98068B				#10	2.11	1.10	0.67	0.11	
98069	1/0	1/0 - 6	1	5/16	2.21	1.20	0.74	0.13	PINK
98069A				#10	2.21	1.20	0.74	0.13	
98069B				1/4	2.21	1.20	0.74	0.13	
98070				3/8	2.21	1.20	0.74	0.13	
98070A				1/2	2.50	1.20	0.74	0.13	
98070B				5/16	2.68	1.38	0.81	0.12	
98071	2/0	2/0 - 4	1/0	3/8	2.68	1.38	0.81	0.12	BLACK
98071A				1/2	2.68	1.38	0.81	0.12	
98071B				1/4	2.68	1.38	0.81	0.13	
98072	3/0	3/0 - 2	2/0	1/2	2.80	1.42	0.90	0.13	ORANGE
98072A				3/8	2.80	1.42	0.90	0.13	
98072B				1/4	2.80	1.42	1.00	0.13	

- Connector with prefix letter 'P' stand for the no's with inspection window.

COPPER COMPRESSION LUG



LONG BARREL ONE HOLE TONGUE WITH AND WITHOUT INSPECTION WINDOW

PART NO	CU COMPACT CLASS B, C, K	EXPANDED RANGE	DLO & FLEX CLASS H, G, M	DIMENSION ARE IN INCHES					COLOR CODE
				STUD SIZE	L	A1	W	C	
98073				1/2	2.80	1.42	1.00	0.13	PURPLE
98073A	4/0	4/0 - 1	3/0	3/8	2.80	1.42	1.00	0.13	
98073B				1/4	3.03	1.59	1.09	0.15	
98074	250	250 - 1/0	3/0	1/2	3.03	1.59	1.09	0.15	YELLOW
98074A				3/8	3.39	1.95	1.19	0.15	
98075	300	300 - 2/0	4/0	1/2	3.46	1.97	1.28	0.17	WHITE
98076	350	350 - 3/0	250	1/2	3.46	1.97	1.28	0.17	RED
98076A				5/8	3.86	1.99	1.39	0.18	
98077	400	400 - 4/0	350	1/2	3.86	1.99	1.39	0.18	BLUE
98078				5/8	4.13	2.26	1.54	0.22	
98079	500	500 - 250	400	1/2	4.13	2.26	1.54	0.22	BROWN
98080				5/8	4.25	2.26	1.72	0.25	
98081	600	600 - 250	450	5/8	5.16	2.64	1.77	0.27	GREEN
98081A	700	700 - 500	--	1/2	5.16	2.64	1.77	0.27	PINK
98081B				5/8	5.16	2.64	1.90	0.27	
98082	750	750 - 500	600	1/2	5.16	2.64	1.90	0.27	BLACK
98082A				5/8	5.16	2.64	1.90	0.27	
98082B	1000	1000 - 750	800	1/2	5.67	3.15	2.18	0.33	WHITE
98082C				5/8	5.67	3.15	2.18	0.33	

- Connector with prefix letter 'P' stand for the no's with inspection window.



COMPRESSION CONNECTORS