


## COPPER COMPRESSION LUG

### LONG BARREL ONE HOLE TONGUE WITH AND WITHOUT INSPECTION WINDOW

- Manufactured from high conductivity seamless copper tubing .
- Tin plating for corrosion resistance .
- Inspection hole to ensure full cable insertion
- Color coded die index and crimp mark .
- Connectors suitable for application with upto 35 KV
- Rated 600 Volts / 90°C
- cULus 486A listed, CSA 22.2 certified.
- Prefix 'F' for flare entry (bell Mount).
- Suffix 'NT' for narrow tongue .
- Prefix 'BT' for blank tongue.
- Prefix 'BTF' blank tongue flared barrel.

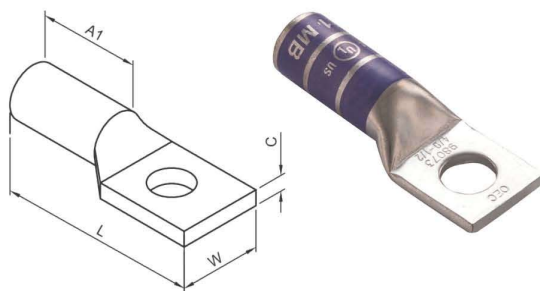

| PART NO | CU COMPACT<br>CLASS B, C, K | EXPANDED<br>RANGE | DLO & FLEX<br>CLASS H, G, M | DIMENSION ARE IN INCHES |      |      |      |      | COLOR<br>CODE |
|---------|-----------------------------|-------------------|-----------------------------|-------------------------|------|------|------|------|---------------|
|         |                             |                   |                             | STUD SIZE               | L    | A1   | W    | C    |               |
| 98064   | 8                           | --                | 8                           | 1/4                     | 1.52 | 0.81 | 0.42 | 0.08 | RED           |
| 98064A  |                             |                   |                             | #10                     | 1.52 | 0.81 | 0.42 | 0.08 |               |
| 98064B  |                             |                   |                             | 3/8                     | 1.59 | 0.81 | 0.57 | 0.05 |               |
| 98065   | 6                           | 6-8               | 7                           | 1/4                     | 1.77 | 0.98 | 0.42 | 0.08 | BLUE          |
| 98065A  |                             |                   |                             | 3/8                     | 1.91 | 0.98 | 0.59 | 0.05 |               |
| 98065B  |                             |                   |                             | 5/16                    | 1.91 | 0.98 | 0.51 | 0.07 |               |
| 98065C  |                             |                   |                             | #10                     | 1.77 | 0.98 | 0.42 | 0.08 |               |
| 98066   | 4                           | 4 - 6             | 5                           | 1/4                     | 1.77 | 0.98 | 0.49 | 0.09 | GRAY          |
| 98066A  |                             |                   |                             | 3/8                     | 1.91 | 0.98 | 0.59 | 0.07 |               |
| 98066B  |                             |                   |                             | 5/16                    | 1.77 | 0.98 | 0.49 | 0.09 |               |
| 98066C  |                             |                   |                             | #10                     | 1.77 | 0.98 | 0.49 | 0.09 |               |
| 98066D  | 3                           | 3 - 6             | 4                           | #10                     | 2.07 | 1.10 | 0.50 | 0.09 | WHITE         |
| 98066E  |                             |                   |                             | 1/4                     | 2.07 | 1.10 | 0.50 | 0.09 |               |
| 98066F  |                             |                   |                             | 5/16                    | 2.07 | 1.10 | 0.55 | 0.09 |               |
| 98066G  |                             |                   |                             | 3/8                     | 2.07 | 1.10 | 0.59 | 0.08 |               |
| 98067   | 2                           | 2 - 6             | 3                           | 5/16                    | 2.07 | 1.10 | 0.60 | 0.10 | BROWN         |
| 98067A  |                             |                   |                             | 3/8                     | 2.07 | 1.10 | 0.60 | 0.10 |               |
| 98067B  |                             |                   |                             | 1/4                     | 2.07 | 1.10 | 0.60 | 0.10 |               |
| 98067C  |                             |                   |                             | #10                     | 2.07 | 1.10 | 0.60 | 0.10 |               |
| 98068   | 1                           | 1 - 6             | 2                           | 5/16                    | 2.11 | 1.10 | 0.67 | 0.11 | GREEN         |
| 98068A  |                             |                   |                             | 3/8                     | 2.21 | 1.10 | 0.67 | 0.11 |               |
| 98068B  |                             |                   |                             | #10                     | 2.11 | 1.10 | 0.67 | 0.11 |               |
| 98069   | 1/0                         | 1/0 - 6           | 1                           | 5/16                    | 2.21 | 1.20 | 0.74 | 0.13 | PINK          |
| 98069A  |                             |                   |                             | #10                     | 2.21 | 1.20 | 0.74 | 0.13 |               |
| 98069B  |                             |                   |                             | 1/4                     | 2.21 | 1.20 | 0.74 | 0.13 |               |
| 98070   |                             |                   |                             | 3/8                     | 2.21 | 1.20 | 0.74 | 0.13 |               |
| 98070A  |                             |                   |                             | 1/2                     | 2.50 | 1.20 | 0.74 | 0.13 |               |
| 98070B  |                             |                   |                             | 5/16                    | 2.68 | 1.38 | 0.81 | 0.12 |               |
| 98071   | 2/0                         | 2/0 - 4           | 1/0                         | 3/8                     | 2.68 | 1.38 | 0.81 | 0.12 | BLACK         |
| 98071A  |                             |                   |                             | 1/2                     | 2.68 | 1.38 | 0.81 | 0.12 |               |
| 98071B  |                             |                   |                             | 1/4                     | 2.68 | 1.38 | 0.81 | 0.13 |               |
| 98072   | 3/0                         | 3/0 - 2           | 2/0                         | 1/2                     | 2.80 | 1.42 | 0.90 | 0.13 | ORANGE        |
| 98072A  |                             |                   |                             | 3/8                     | 2.80 | 1.42 | 0.90 | 0.13 |               |
| 98072B  |                             |                   |                             | 1/4                     | 2.80 | 1.42 | 1.00 | 0.13 |               |

- Connector with prefix letter 'P' stand for the no's with inspection window.

## COPPER COMPRESSION LUG



### LONG BARREL ONE HOLE TONGUE WITH AND WITHOUT INSPECTION WINDOW

| PART NO | CU COMPACT<br>CLASS B, C, K | EXPANDED<br>RANGE | DLO & FLEX<br>CLASS H, G, M | DIMENSION ARE IN INCHES |      |      |      |      | COLOR<br>CODE |
|---------|-----------------------------|-------------------|-----------------------------|-------------------------|------|------|------|------|---------------|
|         |                             |                   |                             | STUD SIZE               | L    | A1   | W    | C    |               |
| 98073   | 4/0                         | 4/0 - 1           | 3/0                         | 1/2                     | 2.80 | 1.42 | 1.00 | 0.13 | PURPLE        |
| 98073A  |                             |                   |                             | 3/8                     | 2.80 | 1.42 | 1.00 | 0.13 |               |
| 98073B  |                             |                   |                             | 1/4                     | 3.03 | 1.59 | 1.09 | 0.15 |               |
| 98074   | 250                         | 250 - 1/0         | 3/0                         | 1/2                     | 3.03 | 1.59 | 1.09 | 0.15 | YELLOW        |
| 98074A  |                             |                   |                             | 3/8                     | 3.39 | 1.95 | 1.19 | 0.15 |               |
| 98075   | 300                         | 300 - 2/0         | 4/0                         | 1/2                     | 3.46 | 1.97 | 1.28 | 0.17 | WHITE         |
| 98076   | 350                         | 350 - 3/0         | 250                         | 1/2                     | 3.46 | 1.97 | 1.28 | 0.17 | RED           |
| 98076A  |                             |                   |                             | 5/8                     | 3.86 | 1.99 | 1.39 | 0.18 |               |
| 98077   | 400                         | 400 - 4/0         | 350                         | 1/2                     | 3.86 | 1.99 | 1.39 | 0.18 | BLUE          |
| 98078   |                             |                   |                             | 5/8                     | 4.13 | 2.26 | 1.54 | 0.22 |               |
| 98079   | 500                         | 500 - 250         | 400                         | 1/2                     | 4.13 | 2.26 | 1.54 | 0.22 | BROWN         |
| 98080   |                             |                   |                             | 5/8                     | 4.25 | 2.26 | 1.72 | 0.25 |               |
| 98081   | 600                         | 600 - 250         | 450                         | 5/8                     | 5.16 | 2.64 | 1.77 | 0.27 | GREEN         |
| 98081A  | 700                         | 700 - 500         | --                          | 1/2                     | 5.16 | 2.64 | 1.77 | 0.27 | PINK          |
| 98081B  |                             |                   |                             | 5/8                     | 5.16 | 2.64 | 1.90 | 0.27 |               |
| 98082   | 750                         | 750 - 500         | 600                         | 1/2                     | 5.16 | 2.64 | 1.90 | 0.27 | BLACK         |
| 98082A  |                             |                   |                             | 5/8                     | 5.16 | 2.64 | 1.90 | 0.27 |               |
| 98082B  | 1000                        | 1000 - 750        | 800                         | 1/2                     | 5.67 | 3.15 | 2.18 | 0.33 | WHITE         |
| 98082C  |                             |                   |                             | 5/8                     | 5.67 | 3.15 | 2.18 | 0.33 |               |

- Connector with prefix letter 'P' stand for the no's with inspection window.



COMPRESSION CONNECTORS