


COPPER COMPRESSION SPLICE

LONG LENGTH COMPRESSION SPLICE



- Manufactured from high conductivity seamless copper tubing .
- Tin plating for corrosion resistance .
- Inspection hole to ensure full cable insertion
- Color coded die index and crimp mark .
- Connectors suitable for application with upto 35 KV
- Rated 600 Volts / 90°C
- cULus 486A listed, CSA 22.2 certified.
- Prefix 'F' for flare entry (bell Mount).

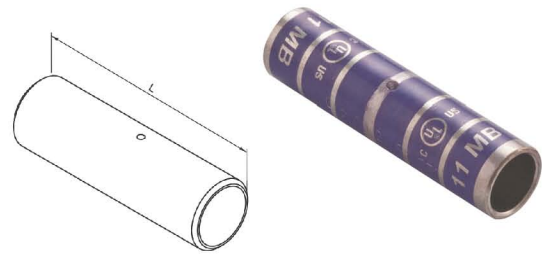

PART NO	CU COMPACT CLASS B, C, K	EXPANDED RANGE	DLO & FLEX CLASS H, G, M	DIMENSION ARE IN INCHES	COLOR CODE
				L	
98127	8	--	8	1.75	RED
98128	6	6-8	7	1.75	BLUE
98129	4	4-6	5	1.75	GRAY
98129A	3	3-6	4	1.90	WHITE
98130	2	2-6	3	1.90	BROWN
98131	1	1-6	2	2.20	GREEN
98132	1/0	1/0-6	1	2.20	PINK
98133	2/0	2/0-4	1/0	2.25	BLACK
98134	3/0	3/0-2	2/0	2.25	ORANGE
98135	4/0	4/0-1	3/0	2.75	PURPLE
98136	250	250-1/0	3/0	3.25	YELLOW
98137	300	300-2/0	4/0	3.50	
98138	350	350-3/0	250	3.75	RED
98139	400	400-4/0	300	3.75	BLUE
98140	500	500-250	400	4.25	BROWN
98141	600	600-250	450	4.50	GREEN
98142	750	750-500	600	4.75	BLACK
98142A	1000	1000-750	800	6.12	WHITE

COMPRESSION CONNECTORS

