



Hammond Power
Solutions Inc.

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX




DRY TYPE
TRANSFORMER
77U5
E112313
LISTED

THREE PHASE DRY TYPE TRANSFORMER
TRANSFORMATEUR SEC TRIPHASÉ

HV/HT	480V	Cust. Ref.	
BIL	—	Réf. du client	
TERM. BORNES	H1 H2 H3	Serial No.	
		No. de série	
		Part No.	MK112KB
		No. de pièce	
		kVA	112.5
		TYPE	K
		Cooling	ANN
		Refroidissement	
		Temp. Rise	150 °C
		Echauffement	
		Temp. Class	220 °C
		Classe de Temp.	
		Frequency	60 Hz
		Fréquence	
		Impédance %	5.6
		@ 170 °C	
		Encl. Type	NEMA-3R
		Type de boîtier	
		Wt LBS	625
		Poids en lbs.	
		Winding	AL
		Enroulement	

SPACINGS BETWEEN ENCLOSURE AND ANY ADJACENT
WALL SHALL BE A MINIMUM OF 6 INCHES

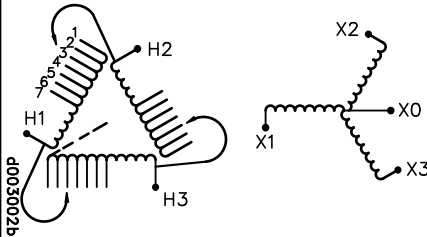

Hammond Power
Solutions Inc.


TITLE: 3PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

3	02/11/12	GC	HCN: 19411	DES: IKLING
2	00/10/12	VG	HCN: 14975	DATE: 99/08/24
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBMK112KB

3.2 jwen 2009/08/13 00:43

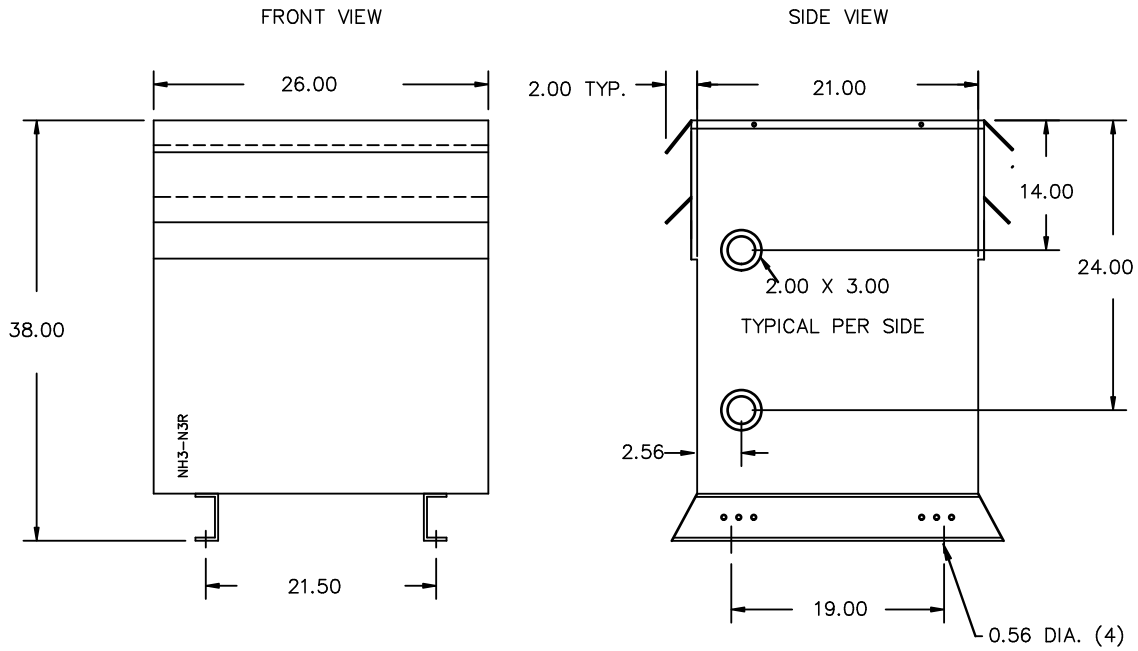


All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 250MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE



MATERIAL: 1/4" (6) THICK AL.

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT



TITLE: 3PH DISTRIBUTION TRANSFORMER

3	02/11/12	GC	HCN: 19411	DES: IKLING
2	00/10/12	VG	HCN: 14975	DATE: 99/08/24
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBMK112KB

3.2 jwen 2009/08/13 00:43