



Hammond Power
Solutions Inc.

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX




DRY TYPE
TRANSFORMER
77U5
E112313

LISTED

THREE PHASE DRY TYPE TRANSFORMER
TRANSFORMATEUR SEC TRIPHASE

HV/HT	480Y/277V				Cust. Ref.																									
BIL	-				Serial No.																									
TERM. BORNES	H0 H1 H2 H3				Part No.	MK075BK																								
	<table border="1"> <thead> <tr> <th>VOLTS</th> <th>CURRENT COURANT</th> <th>% RATED VOLTAGE % TENSION NOMINALE</th> <th>CONNECTION EACH PHASE CONNEXION PAR PHASE</th> </tr> </thead> <tbody> <tr> <td>218</td> <td>198.0</td> <td>105</td> <td>1</td> </tr> <tr> <td>213</td> <td>203.0</td> <td>102.5</td> <td>2</td> </tr> <tr> <td>208</td> <td>208.0</td> <td>100</td> <td>3</td> </tr> <tr> <td>203</td> <td>214.0</td> <td>97.5</td> <td>4</td> </tr> <tr> <td>198</td> <td>219.0</td> <td>95</td> <td>5</td> </tr> </tbody> </table>				VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	218	198.0	105	1	213	203.0	102.5	2	208	208.0	100	3	203	214.0	97.5	4	198	219.0	95	5	kVA	75
VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE																											
218	198.0	105	1																											
213	203.0	102.5	2																											
208	208.0	100	3																											
203	214.0	97.5	4																											
198	219.0	95	5																											
					TYPE	K																								
					Cooling Refroidissement	ANN																								
					Temp. Rise Echauffement	150 ° C																								
					Temp. Class Classe de Temp.	220 ° C																								
					Frequency Fréquence	60 Hz																								
					Impédance % @ 170 ° C	4.0																								
					Encl. Type Type de boîtier	NEMA-3R																								
LV/BT	208V				Wt LBS Poids en lbs.	610																								
BIL	-				Winding Enroulement	AL																								
TERM. BORNES	X1 X2 X3																													

SPACINGS BETWEEN ENCLOSURE AND ANY ADJACENT
WALL SHALL BE A MINIMUM OF 6 INCHES

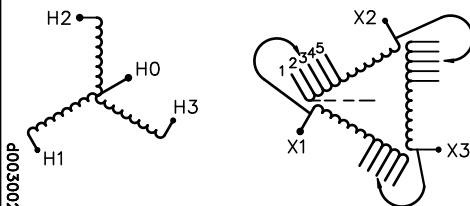

Hammond Power
Solutions Inc.


TITLE: 3PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

2	05/04/28	MF	HCN: 23719	DES: EBULIN
1	02/04/04	MB	HCN: 18551	DATE: 99/10/01
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBMK075BK

2.1 jwen 2009/08/13 00:40

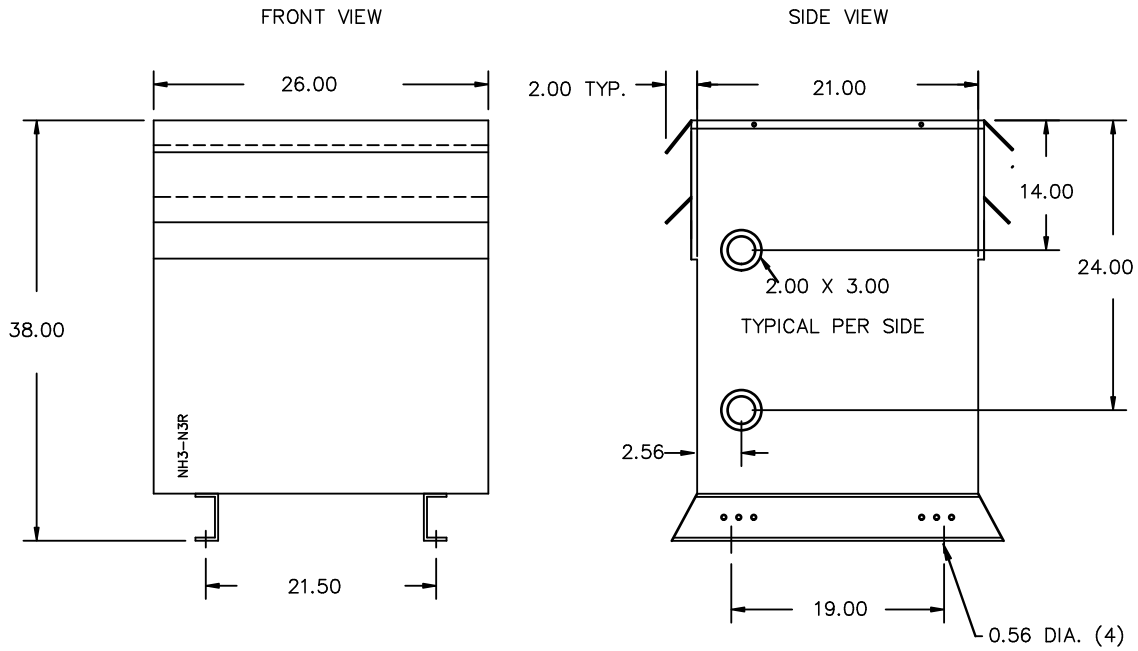

All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 600MCM-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"-THERMOSTAT PER COIL CONNECTED TO T.B.



**Hammond Power
Solutions Inc.**

TITLE: 3PH DISTRIBUTION TRANSFORMER

2	05/04/28	MF	HCN: 23719	DES: EBULIN
1	02/04/04	MB	HCN: 18551	DATE: 99/10/01
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBMK075BK

2.1 jwen 2009/08/13 00:40