

Specifications

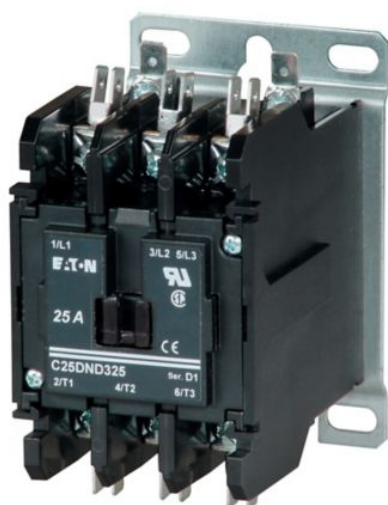


Photo is representative

Eaton C25DND225A

Eaton definite purpose contactor, Non-reversing contactors and starters (C306), Compact, two-pole , Open with metal mounting plate ,Binding head screw and quick connect terminals (side-by-side) ,50A,110–120 Vac, 50/60 Hz ,Global Listed

General specifications

PRODUCT NAME	Eaton definite purpose contactor
CATALOG NUMBER	C25DND225A
UPC	782116300303
PRODUCT LENGTH/DEPTH	3.35 in
PRODUCT HEIGHT	3.75 in
PRODUCT WIDTH	2.4 in
PRODUCT WEIGHT	1.3 lb
WARRANTY	1 year
CERTIFICATIONS	UL Recognized CSA Certified



Product specifications

AMPERAGE RATING	25A
-----------------	-----

Resources

NUMBER OF POLES	Two-pole
TYPE	Non-reversing
COIL	110-120 Vac, 50/60 Hz
ENCLOSURE	Open with metal mounting plate
FRAME SIZE	15-50 A, two-pole and three-pole
INDUCTIVE FULL LOAD	25 A
MODEL	Contactactor
RESISTIVE LOAD	35 A
TERMINALS	Screw/pressure plate and quick connect terminals (side-by-side)
CONNECTION	Quick

CATALOGS	Motor Control and Protection, Definite Purpose Contactors and Starters, Volume 5, Tab 4
SPECIFICATIONS AND DATASHEETS	Eaton Specification Sheet - C25DND225A

PROJECT NAME:
PROJECT NUMBER:
PREPARED BY:
DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Eaton is a registered trademark. Follow us on social media to get the latest product and support information.
All other trademarks are property of their respective owners.

