



1.1 Electric ratings: AC50/60Hz, up to 690V;
1.2 Standard: IEC/EN 60947-4-1



Item		CJ19-25	CJ19-32	CJ19-43	CJ19-63	CJ19-95	CJ19-115	CJ19-150	CJ19-170
Controll able capacitor Capacity kvar	220/230V	6.7	10	15	20	35	40	46	52
	380/400V	12.5	20	25	33.3	50	60	80	90
	660/690V	18	26	36	48	92	100	120	130
Rated Isolation Voltage Ue V		690							
Rated Operational Voltage Ue V		220/230V,380/400V,660/690V							
Conventional thermal current I th A		25	32	43	63	95	200	200	275
Reted Operational currentIe A(380V)		17	23	29	43	72.2	87	115	130
Restrained surge capacity		20 Ie							
Capacity of Auxiliary contact		AC-15:Ie:0.95A Ue:380/400V DC-13:Ie:0.15A Ue:220/250V Conventional thermal currentIth:10A							
Operating Frequency cycles/h		120							
Electrical durability 10 ⁴		10					2		
Mechanical durability 10 ⁴		100					300		

3.1 Ambient temperature: $-5^{\circ}\text{C} \sim +40^{\circ}\text{C}$, the average during 24 hours should not exceed $+35^{\circ}\text{C}$;

3.2 Altitude: $\leq 2000\text{m}$;

3.3 Atmosphere conditions: At mounting site, relative humidity not exceed 50% at the max temperature of $+40^{\circ}\text{C}$, higher relative humidity is allowable under lower temperature. For example, RH could be 90% at $+20^{\circ}\text{C}$, special measures should be taken to occurrence of dews;

3.4 Pollution degree: 3

3.5 Installation category: III


3.6 Installation conditions : the inclination between installation plane and vertical plane is within $\pm 5^{\circ}$

3.7 Impact and shake: the products should locate in the places where there are no obvious impact and shake.


3.8 Protection class: IP10

5. Overall and mounting dimensions (mm)


CJ19-25~43

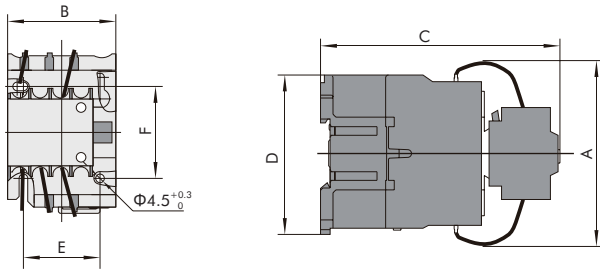

CJ19-63~95

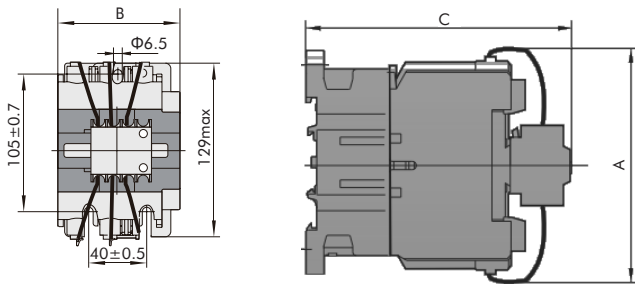

CJ19-115~170

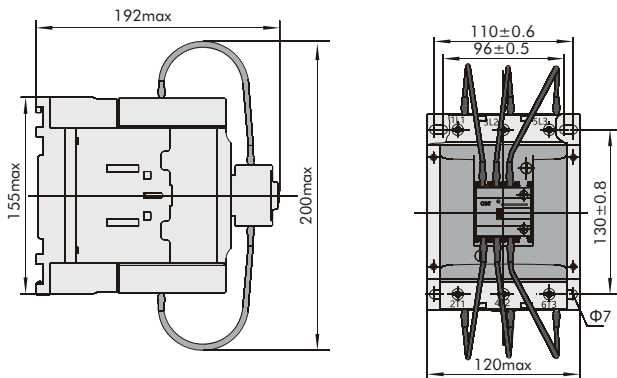

Model	Amax	Bmax	Cmax	Dmax	E	F	Note
CJ19-25	80	47	124	76	34/35	50/60	Not only fixed by screws but also could be fixed with 35mm din rail
CJ19-32	90	58	132	86	40	48	
CJ19-43	90	58	136	86	40	48	
CJ19-63	132	79	150	-	-	-	Not only fixed by screws but also could be fixed with 35mm and 75mm din rail
CJ19-95	135	87	158	-	-	-	
CJ19-115	200	120	192	155			Not only fixed by screws but also could be fixed with two 35mm din rail
CJ19-150	200	120	192	155			
CJ19-170	200	120	192	155			

6. Wiring and installation

6.1 The connection terminals are protected through insulation cover, which is reliable and secure for installation and operation;

6.2 For CJ19-25~43, screws are available for installation, as well as the DIN rail;

for CJ19-63~95, 35mm or 75mm standard rail are available for installation.

for CJ19-115~170, screws are available for installation, as well as two 35mm DIN rail.

lth	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
63A	3P	1NO+2NC	AC 110V 50/60Hz	CJ19-63/12 110V 50/60Hz	244073
63A	3P	1NO+2NC	AC 110V 50Hz	CJ19-63/12 110V 50Hz	244074
63A	3P	1NO+2NC	AC 110V 60Hz	CJ19-63/12 110V 60Hz	244075
63A	3P	1NO+2NC	AC 127V 50/60Hz	CJ19-63/12 127V 50/60Hz	244076
63A	3P	1NO+2NC	AC 127V 50Hz	CJ19-63/12 127V 50Hz	244077
63A	3P	1NO+2NC	AC 127V 60Hz	CJ19-63/12 127V 60Hz	244078
63A	3P	1NO+2NC	AC 220V 50/60Hz	CJ19-63/12 220V 50/60Hz	244079
63A	3P	1NO+2NC	AC 220V 50Hz	CJ19-63/12 220V 50Hz	244080
63A	3P	1NO+2NC	AC 220V 60Hz	CJ19-63/12 220V 60Hz	244081
63A	3P	1NO+2NC	AC 230V 50/60Hz	CJ19-63/12 230V 50/60Hz	244082
63A	3P	1NO+2NC	AC 230V 50Hz	CJ19-63/12 230V 50Hz	244083
63A	3P	1NO+2NC	AC 230V 60Hz	CJ19-63/12 230V 60Hz	244084
63A	3P	1NO+2NC	AC 240V 50/60Hz	CJ19-63/12 240V 50/60Hz	244085
63A	3P	1NO+2NC	AC 240V 50Hz	CJ19-63/12 240V 50Hz	244086
63A	3P	1NO+2NC	AC 240V 60Hz	CJ19-63/12 240V 60Hz	244087
63A	3P	1NO+2NC	AC 24V 50/60Hz	CJ19-63/12 24V 50/60Hz	244088
63A	3P	1NO+2NC	AC 24V 50Hz	CJ19-63/12 24V 50Hz	244089
63A	3P	1NO+2NC	AC 24V 60Hz	CJ19-63/12 24V 60Hz	244090
63A	3P	1NO+2NC	AC 36V 50/60Hz	CJ19-63/12 36V 50/60Hz	244091
63A	3P	1NO+2NC	AC 36V 50Hz	CJ19-63/12 36V 50Hz	244092
63A	3P	1NO+2NC	AC 36V 60Hz	CJ19-63/12 36V 60Hz	244093
63A	3P	1NO+2NC	AC 380V 50/60Hz	CJ19-63/12 380V 50/60Hz	244094
63A	3P	1NO+2NC	AC 380V 50Hz	CJ19-63/12 380V 50Hz	244095
63A	3P	1NO+2NC	AC 380V 60Hz	CJ19-63/12 380V 60Hz	244096
63A	3P	1NO+2NC	AC 400V 50/60Hz	CJ19-63/12 400V 50/60Hz	244097
63A	3P	1NO+2NC	AC 400V 50Hz	CJ19-63/12 400V 50Hz	244098
63A	3P	1NO+2NC	AC 400V 60Hz	CJ19-63/12 400V 60Hz	244099
63A	3P	1NO+2NC	AC 415V 50/60Hz	CJ19-63/12 415V 50/60Hz	244100
63A	3P	1NO+2NC	AC 415V 50Hz	CJ19-63/12 415V 50Hz	244101
63A	3P	1NO+2NC	AC 415V 60Hz	CJ19-63/12 415V 60Hz	244102
63A	3P	1NO+2NC	AC 42V 50/60Hz	CJ19-63/12 42V 50/60Hz	244103
63A	3P	1NO+2NC	AC 42V 50Hz	CJ19-63/12 42V 50Hz	244104
63A	3P	1NO+2NC	AC 42V 60Hz	CJ19-63/12 42V 60Hz	244105
63A	3P	1NO+2NC	AC 440V 50/60Hz	CJ19-63/12 440V 50/60Hz	244106
63A	3P	1NO+2NC	AC 440V 50Hz	CJ19-63/12 440V 50Hz	244107
63A	3P	1NO+2NC	AC 440V 60Hz	CJ19-63/12 440V 60Hz	244108
63A	3P	1NO+2NC	AC 48V 50/60Hz	CJ19-63/12 48V 50/60Hz	244109
63A	3P	1NO+2NC	AC 48V 50Hz	CJ19-63/12 48V 50Hz	244110
63A	3P	1NO+2NC	AC 48V 60Hz	CJ19-63/12 48V 60Hz	244111

Ith	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
63A	3P	2NO+1NC	AC 110V 50/60Hz	CJ19-63/21 110V 50/60Hz	244115
63A	3P	2NO+1NC	AC 110V 50Hz	CJ19-63/21 110V 50Hz	244116
63A	3P	2NO+1NC	AC 110V 60Hz	CJ19-63/21 110V 60Hz	244117
63A	3P	2NO+1NC	AC 127V 50/60Hz	CJ19-63/21 127V 50/60Hz	244118
63A	3P	2NO+1NC	AC 127V 50Hz	CJ19-63/21 127V 50Hz	244119
63A	3P	2NO+1NC	AC 127V 60Hz	CJ19-63/21 127V 60Hz	244120
63A	3P	2NO+1NC	AC 220V 50/60Hz	CJ19-63/21 220V 50/60Hz	244121
63A	3P	2NO+1NC	AC 220V 50Hz	CJ19-63/21 220V 50Hz	244122
63A	3P	2NO+1NC	AC 220V 60Hz	CJ19-63/21 220V 60Hz	244123
63A	3P	2NO+1NC	AC 230V 50/60Hz	CJ19-63/21 230V 50/60Hz	244124
63A	3P	2NO+1NC	AC 230V 50Hz	CJ19-63/21 230V 50Hz	244125
63A	3P	2NO+1NC	AC 230V 60Hz	CJ19-63/21 230V 60Hz	244126
63A	3P	2NO+1NC	AC 240V 50/60Hz	CJ19-63/21 240V 50/60Hz	244127
63A	3P	2NO+1NC	AC 240V 50Hz	CJ19-63/21 240V 50Hz	244128
63A	3P	2NO+1NC	AC 240V 60Hz	CJ19-63/21 240V 60Hz	244129
63A	3P	2NO+1NC	AC 24V 50/60Hz	CJ19-63/21 24V 50/60Hz	244130
63A	3P	2NO+1NC	AC 24V 50Hz	CJ19-63/21 24V 50Hz	244131
63A	3P	2NO+1NC	AC 24V 60Hz	CJ19-63/21 24V 60Hz	244132
63A	3P	2NO+1NC	AC 36V 50/60Hz	CJ19-63/21 36V 50/60Hz	244133
63A	3P	2NO+1NC	AC 36V 50Hz	CJ19-63/21 36V 50Hz	244134
63A	3P	2NO+1NC	AC 36V 60Hz	CJ19-63/21 36V 60Hz	244135
63A	3P	2NO+1NC	AC 380V 50/60Hz	CJ19-63/21 380V 50/60Hz	244136
63A	3P	2NO+1NC	AC 380V 50Hz	CJ19-63/21 380V 50Hz	244137
63A	3P	2NO+1NC	AC 380V 60Hz	CJ19-63/21 380V 60Hz	244138
63A	3P	2NO+1NC	AC 400V 50/60Hz	CJ19-63/21 400V 50/60Hz	244139
63A	3P	2NO+1NC	AC 400V 50Hz	CJ19-63/21 400V 50Hz	244140
63A	3P	2NO+1NC	AC 400V 60Hz	CJ19-63/21 400V 60Hz	244141
63A	3P	2NO+1NC	AC 415V 50/60Hz	CJ19-63/21 415V 50/60Hz	244142
63A	3P	2NO+1NC	AC 415V 50Hz	CJ19-63/21 415V 50Hz	244143
63A	3P	2NO+1NC	AC 415V 60Hz	CJ19-63/21 415V 60Hz	244144
63A	3P	2NO+1NC	AC 42V 50/60Hz	CJ19-63/21 42V 50/60Hz	244145
63A	3P	2NO+1NC	AC 42V 50Hz	CJ19-63/21 42V 50Hz	244146
63A	3P	2NO+1NC	AC 42V 60Hz	CJ19-63/21 42V 60Hz	244147
63A	3P	2NO+1NC	AC 440V 50/60Hz	CJ19-63/21 440V 50/60Hz	244148
63A	3P	2NO+1NC	AC 440V 50Hz	CJ19-63/21 440V 50Hz	244149
63A	3P	2NO+1NC	AC 440V 60Hz	CJ19-63/21 440V 60Hz	244150
63A	3P	2NO+1NC	AC 48V 50/60Hz	CJ19-63/21 48V 50/60Hz	244151
63A	3P	2NO+1NC	AC 48V 50Hz	CJ19-63/21 48V 50Hz	244152
63A	3P	2NO+1NC	AC 48V 60Hz	CJ19-63/21 48V 60Hz	244153
63A	3P	2NO+1NC	AC 480V 50/60Hz	CJ19-63/21 480V 50/60Hz	244237