


SECURE




+ **Brida**
Clamp
Collier

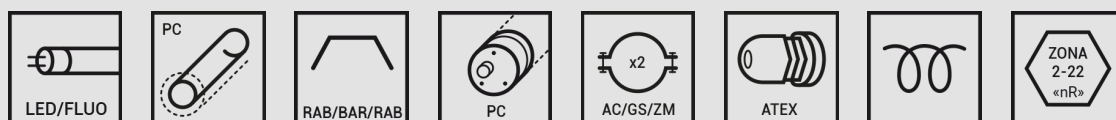


APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES



Temperatura ambiente: -25 a +45°C.
Ambient working temperature: -20 a +45°C.
Température de travail : -25 a +45°C.

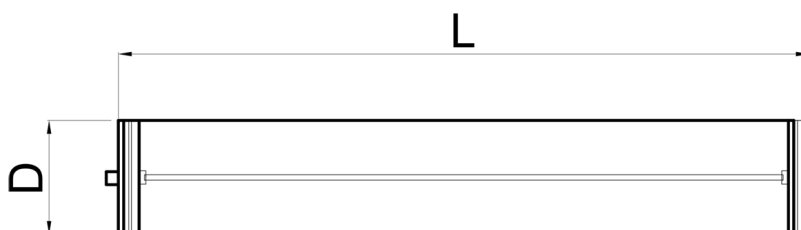

IT - DE

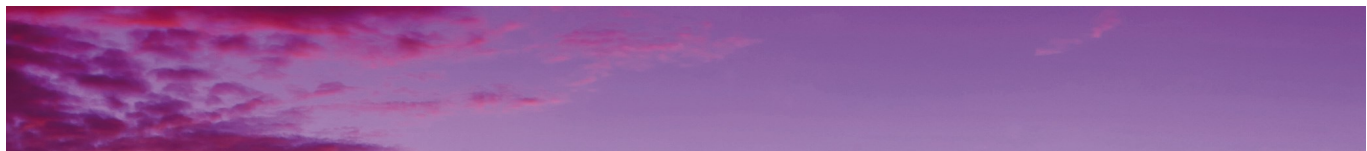

IP68-2

IK10



2014/34/EU




II 3GD
Ex nR IIC T6 Gc
Ex tc IIIC T85°C Dc




TUBO FLUORESCENTE / LAMP / LAMPE

Ref.	Potencia Power <i>Puissance</i>	Equipo Equipment <i>Ballast</i>	L	D	D + brida D + clamp <i>D + fixations</i>	Embalaje Packaging <i>Emballage</i>
	(W)		(mm)	(mm)	(mm)	
EX601	1 x 18	■	722	100	113	1
EX602	1 x 36	■	1.319	100	113	1
EX603	1 x 58	■	1.624	100	113	1
EX612	2 x 18	■	722	100	113	1
EX613	2 x 36	■	1.319	100	113	1
EX614	2 x 58	■	1.624	100	113	1


■ Electrónica / Electronic / Électronique



1x



2x

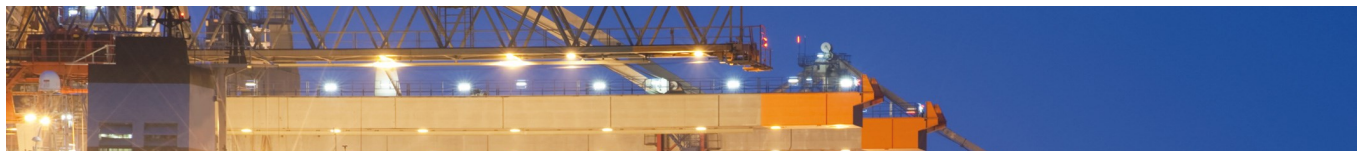

IP68-2
IK10



2014/34/EU




II 3GD
Ex nR IIC T6 Gc
Ex tc IIC T85°C Dc



TUBO LED / LED TUBE / TUBE LED

Ref.	Longitud de tubo Tube length <i>Longueur tube</i>	L	D	D + brida D + clamp <i>D + fixations</i>	Embalaje Packaging <i>Emballage</i>
	(mm)	(mm)	(mm)	(mm)	
EX601L	1 x 600	722	100	113	1
EX602L	1 x 1.200	1.357	100	113	1
EX603L	1 x 1.500	1.659	100	113	1
EX612L	2 x 600	722	100	113	1
EX613L	2 x 1.200	1.357	100	113	1
EX614L	2 x 1.500	1.659	100	113	1

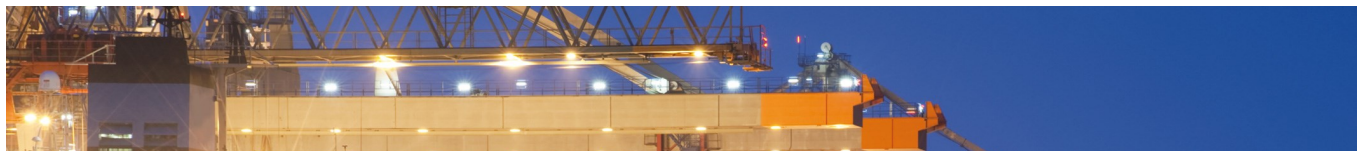

IP68-2
IK10



2014/34/EU



II 3GD
Ex nR IIC T6 Gc
Ex tc IIC T85°C Dc



ACCESORIOS SECURE / SECURE ACCESSORIES / ACCESSOIRES SECURE



Ref. Q0349

Suspensión con cable de acero
Steel cable suspension
Suspension avec câble en acier



Q0401

Bridas de acero inoxidable
Stainless steel clamps
Colliers inox antivandalisme



Q0156

Bridas de acero inoxidable de apertura rápida
Quick opening stainless Steel clamps
Colliers inox de ouverture rapide à grenouillère



Q0159

Bridas de acero cincado
Zinc-plated steel clamps
Colliers en acier galvanisé



Q0147

Pieza anticavitación
Anticavitation piece
Kit anti-cavitation



Ref.

Q0153

Brida policarbonato anti vandálica
Anti-vandalic PC clamp
Colliers en polycarbonate



Q0978

Sujeción a báculo
Pole adapter
Adaptateur de lampadaire



Ref. EX623

Bridas en plástico antiestático (2 uds.)
Antistatic plastic clamps (2 units)
Colliers en plastique antistatique (2 uts.)