



# Acqua 12™


8' For LED Tubes or LEDs + Driver

The Acqua 12™ Series carries an IP65 rating that ensures integrity in damp and wet locations. Provides protection not just from ambient moisture, but also from jets of water. It is ideal for use in environments where dust, dirt, humidity or moisture are present.

The Acqua 12™ Series utilizes a patented durable injected PC molded, IK08 Rated. Natural silicone gel gasket bonded to the housing, captive, corrosion-resistant, cam-action PC clips latches (20 pcs) secure the diffuser. Patented Polycarbonate Prismatic diffuser UV stabilized (Opal also available), with unique shape design, provides maximum luminance and distribution pattern. Metal tray, 0.5mm thickness, comes standard with 8 holes x lamp holders (2x8' or 4x4' lamps configuration) and also can be used for leds + driver. Gland connector, mounting bracket and terminal block are included. SS clips optional are optional.


The Acqua 12™ Series has UL Component Recognition means that UL has evaluated components or materials intended for use in a complete product or system. These components are intended only for end-use products that may be eligible for UL certification.

The Acqua 12™ Series is ideal for applications as food processing areas, refrigerated areas, canopies, shipping docks, parking garages and other non-hazardous areas.



## Dimensions (mm)

2 Lamp Configuration

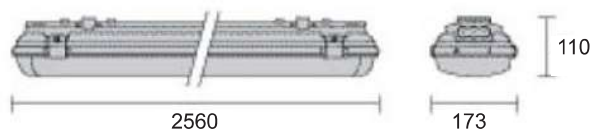

## Ordering information

Item  
AL586376

Optional:  
O PC Opal diffuser  
S 304SS Clips

Lampholders  
1 UL FA8 (4)  
3 UL T8-G13 (4)

## Packing information

Model	Pieces per box	Master Box (cm)	CBM (box)	Gross weight (KGS)
8' 2 Lamps	2	257.5 x 18.8 x 23.5	0.1137	15