


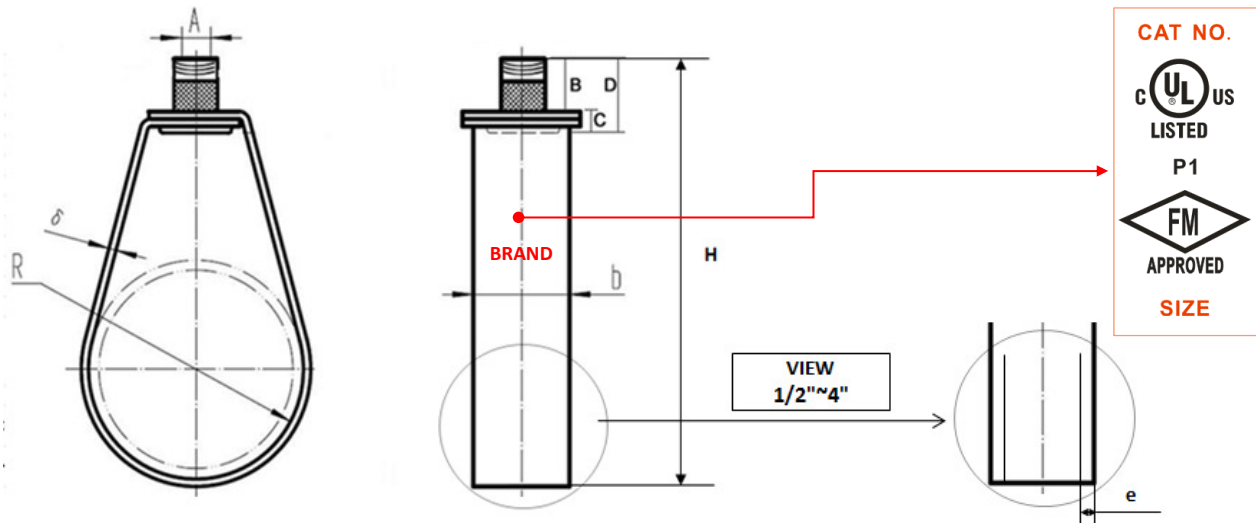

Technical Specifications :

- 1.Surface Treatment : Pre-Galvanized
- 2.The Loop Nuts thread per UNC standard
- 3.Tolerance : $\pm 0.1\text{mm}$ except for specialized

FM

CAT NO.	SIZE	A	B	C	D	R	b		δ		H		e
							Dimention	Tolerance	Dimention	Tolerance	Dimention	Tolerance	
		unit is "mm" except for specialized											
S-075	3/4"	3/8"	16.4	5.6	22.0	1.05"	16.0		1.2		76	±3.0	4.0
S-100	1"	3/8"	16.4	5.6	22.0	1.315"	16.0		1.2		84	±3.0	4.0
S-125	1-1/4"	3/8"	16.4	5.6	22.0	1.66"	16.0		1.2		95	±3.0	4.0
S-150	1-1/2"	3/8"	16.4	5.6	22.0	1.9"	16.0		1.2		98	±3.0	4.0
S-200	2"	3/8"	16.4	5.6	22.0	2.375"	16.0		1.2		109	±3.0	4.0
S-250	2-1/2"	3/8"	15.8	6.2	22.0	2.875"	22.0	±0.3	1.5	±0.3	146	±3.0	4.5
S-300	3"	3/8"	15.8	6.2	22.0	3.5"	22.0		1.5		162	±3.0	4.5
S-400	4"	3/8"	15.8	6.2	22.0	4.5"	22.0		2.0		190	±3.0	4.5
S-500	5"	1/2"	18.5	10.0	28.5	5.562"	19.0	±0.3	2.5	±0.3	228	±3.0	none
S-600	6"	1/2"	18.5	10.0	28.5	6.625"	19.0		2.5		259	±3.0	none

Title:

SWIVEL BAND HANGER

DWG BY:	Date:	Scale:	REV:	DWG No.:
Cheng	2017-7-1	2:1	B	PSD/WI-12-2018
Check By:	Date:	Weight:	Material : SGCC	
Xean	2017-8-15			
Approved By :	Date:	Size:		
Kevin Mao	2018-8-15	A4		

Dec.7.2018

We hereby certify that the foregoing data is a true copy of the Quality Certificate issued by the Manufacturer, and that the original files rest in our offices.