


Aluminum Panelboard Lugs - Two Hole Tongue

Types PB-D and PB-N

For use with two, three, or four copper or aluminum conductors

- Manufactured from high strength aluminum alloy extrusion
- Electro-tin plated to ensure minimum contact resistance and protection against corrosion when used with copper wire
- Stack design allows for easy installation where space is limited
- Rated for 600 V, 90°C applications
- The use of oxide inhibitor is recommended for all aluminum terminations

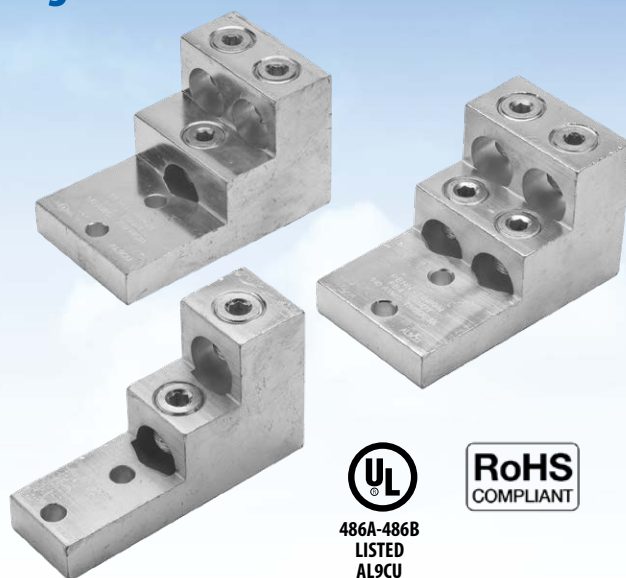

UL
486A-486B
LISTED
AL9CU

RoHS
COMPLIANT

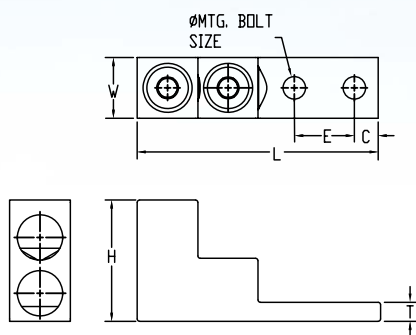


FIG. 1

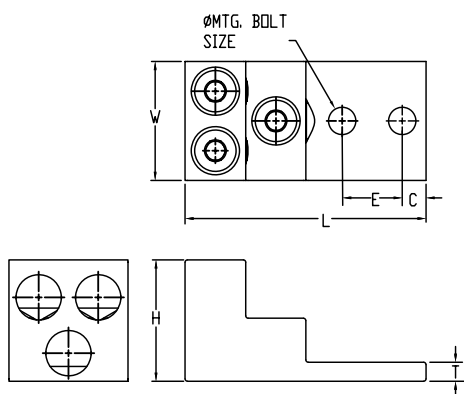


FIG. 2

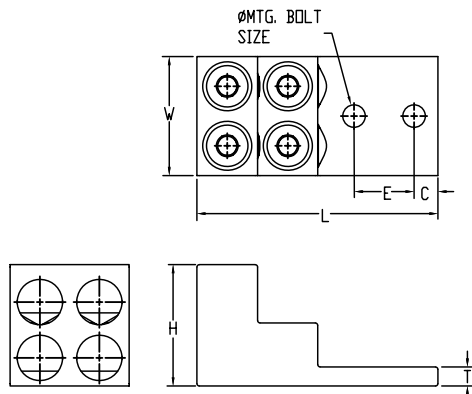


FIG. 3

CATALOG NUMBER	FIGURE NUMBER	CONDUCTOR RANGE	NO. OF CONDUCTORS	FIGURE DIMENSIONS (IN.)						MTG. BOLT SIZE	HEX SIZE
				L	W	H	T	C	E		
PB2-350D	1	6 AWG - 350 kcmil	2	3.86	1.00	2.00	.31	.39	1.00	5/16	5/16
PB2-350D1	1		2	3.86	1.00	2.00	.31	.39	1.00	3/8	5/16
PB3-350D	2		3	3.86	1.97	2.00	.31	.39	1.00	5/16	5/16
PB3-350D1	2		3	3.86	1.97	2.00	.31	.39	1.00	3/8	5/16
PB4-350D	3		4	3.86	1.97	2.00	.31	.39	1.00	5/16	5/16
PB4-350D1	3		4	3.86	1.97	2.00	.31	.39	1.00	3/8	5/16
PB2-600D1	1	2 AWG - 600 kcmil	2	4.94	1.50	3.00	.76	.39	1.38	3/8	5/16
PB2-600N	1		2	5.47	1.50	3.00	.76	.62	1.75	1/2	5/16
PB3-600D1	2		3	4.94	2.68	3.00	.76	.39	1.38	3/8	5/16
PB3-600N	2		3	5.47	2.68	3.00	.76	.62	1.75	1/2	5/16
PB4-600D1	3		4	4.94	2.68	3.00	.76	.39	1.38	3/8	5/16
PB4-600N	3		4	5.47	2.68	3.00	.76	.62	1.75	1/2	5/16
PB2-750D1	1	1/0 AWG - 750 kcmil	2	4.94	1.58	3.00	.76	.39	1.38	3/8	5/16
PB2-750N	1		2	5.47	1.58	3.00	.76	.62	1.75	1/2	5/16
PB3-750D1	2		3	4.94	2.84	3.00	.76	.39	1.38	3/8	5/16
PB3-750N	2		3	5.47	2.84	3.00	.76	.62	1.75	1/2	5/16
PB4-750D1	3		4	4.94	2.84	3.00	.76	.39	1.38	3/8	5/16
PB4-750N	3		4	5.47	2.84	3.00	.76	.62	1.75	1/2	5/16