

■ Regulator Control Type




- Compact size condenser controlled regulator
- 5-speed selection
- Thermal fuse prevent overheating or power surge
- Safety wire provided
- Cut-off safety switch equipped
- Fall prevention of blade adopted
- Permanently lubricated ball-bearing assembly
- Lamp kits adaptable (Lamp kit is not included)
- Color:
 - Body - White
 - Ring - White



M56LG

■ Dimension

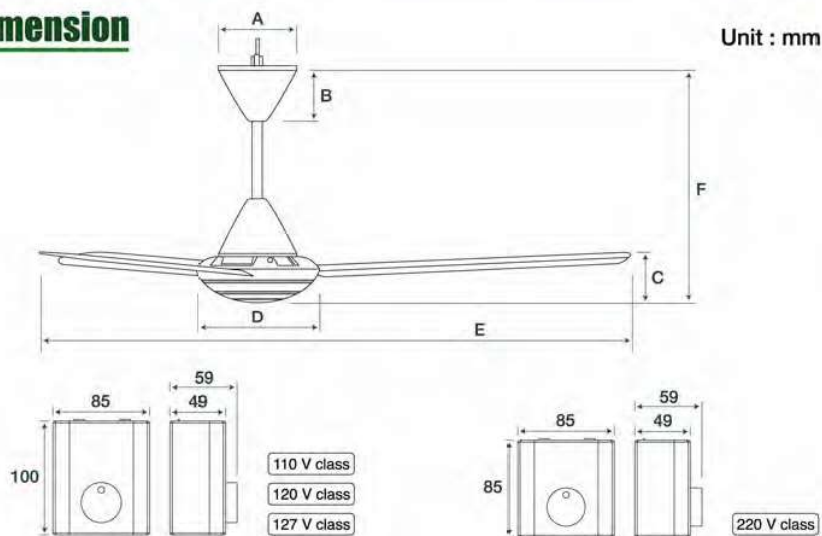

A	Ø152
B	103.8
C	82.2
D	Ø238
E	Ø1,400

Pipe type	Pipe Length [mm]	F
9 inch	229	375.7
12 inch	305	451.7
16 inch	406	552.7
18 inch	457	603.7
22 inch	559	705.7

■ Specification

Model No.	Voltage			Consumption [W]	R.P.M. [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]	*			[m/min]	[ft/min]	[m³/min]	[ft³/min]	
M56LG	110	50	Hi	52	236	150	492	195	6,887	5.6
			Lo	12	92	-	-	-	-	
		60	Hi	63	259	165	542	225	7,946	
			Lo	13	97	-	-	-	-	
	120	50	Hi	63	249	155	509	205	7,240	
			Lo	14	101	-	-	-	-	
		60	Hi	78	276	170	558	230	8,123	
			Lo	15	105	-	-	-	-	
	127	50	Hi	62	248	155	509	205	7,240	
			Lo	16	112	-	-	-	-	
		60	Hi	79	278	170	558	230	8,123	
			Lo	17	112	-	-	-	-	
	220	50	Hi	62	246	155	509	200	7,063	
			Lo	16	106	-	-	-	-	
		60	Hi	76	268	170	558	225	7,946	
			Lo	17	106	-	-	-	-	

* Hi - Notch 5 / Lo - Notch 1