



Hammond Power
Solutions Inc.

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX



LR 3902



DRY TYPE
TRANSFORMER
7705
E112313

LISTED

THREE PHASE DRY TYPE TRANSFORMER
TRANSFORMATEUR SEC TRIPHAS?

HV/HT

480V

BIL

-

TERM.
BORNES

H1 H2 H3

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
504	258	105	1
492	264	102.5	2
480	271	100	3
468	278	97.5	4
456	285	95	5
444	293	92.5	6
432	301	90	7

LV/BT

208Y/120V

BIL

-

TERM.
BORNES

X0 X1 X2 X3

Cust. Ref.
R?f. du client

Serial No.
No. de s?rie

Part No.
No. de pi?ce

MK225KB

kVA 225

TYPE K

Cooling
Refroidissement

ANN

Temp. Rise
?chauffement

150 °C

Temp. Class
Classe de Temp.

220 °C

Frequency
Fr?quence

60 Hz

Imp?dance %
@ 170 °C

6.3

Encl. Type
Type de bo?tier


3R

Wt LBS
Poids en lbs.

1150

Winding
Enroulement

AL

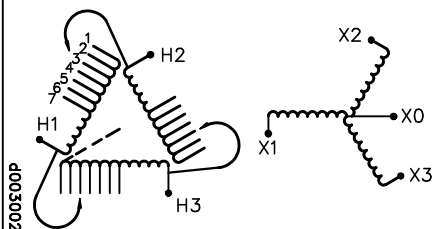

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND
ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES

DO NOT INSTALL IN AREAS ACCESSIBLE TO PUBLIC
NE PAS INSTALLER DANS DES ENDROITS ACCESSIBLES AU PUBLIC



Hammond Power
Solutions Inc.


TITLE: 3PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

2	13/11/04	DC	UPDATED DWGS(HCN 47492)	DES: IKLING
1	02/01/31	PS	HCN:17028	DATE: 99/08/24
NO.	DATE	BY	REVISION	SCALE: NTS


SHEET 1 OF 2

EDBMK225KB

2.1 dcortez 2014/09/03 13:17

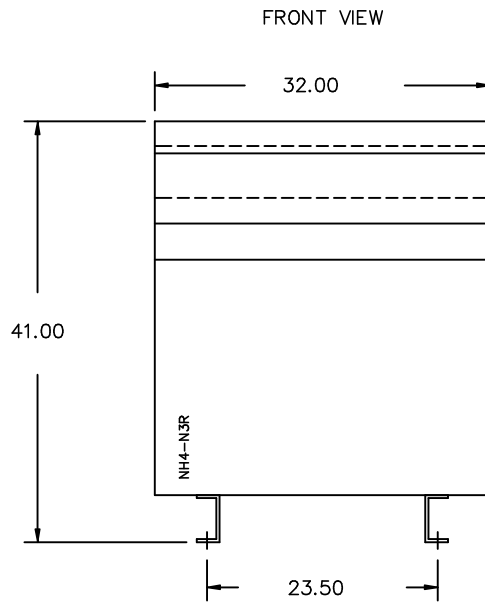

All Dimensions in inches

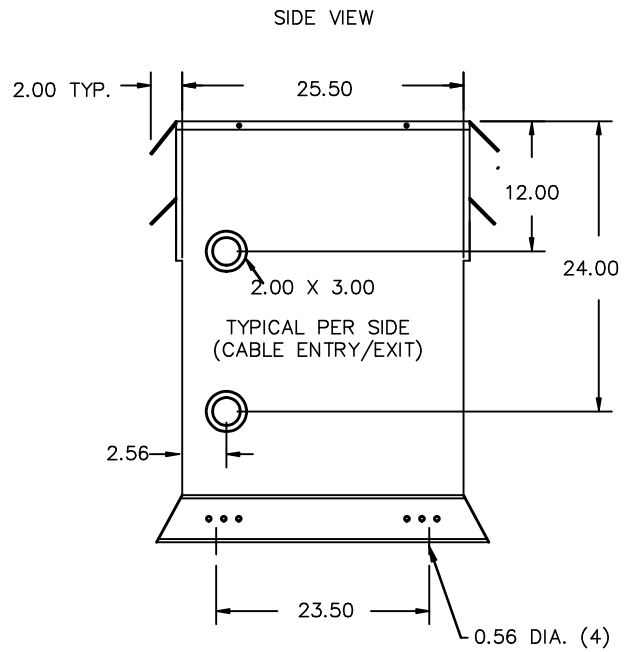


ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 350MCM-6 CU/AL
CONDUCTORS
2 CONDUCTORS PER PHASE



CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT



TITLE: 3PH DISTRIBUTION TRANSFORMER

2	13/11/04	DC	UPDATED DWGS(HCN 47492)	DES: IKLING
1	02/01/31	PS	HCN:17028	DATE: 99/08/24
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBMK225KB

2.1 dcortez 2014/09/03 13:17